

STARCO TUSKER



STARCO TUSKER

FLT solid tyres

The Tusker

The bull elephant, the tusker, is renowned for its resilience, endurance and physical strength. As a beast of burden, the tusker is second to none. As a name for STARCO's new range of solid rubber tyres for fork lift trucks, Tusker was an obvious choice, because here is a product that will also be renowned for resilience, endurance and physical strength.



The leader - in design and modern technology

The Tusker range of solid rubber tyres was developed with the latest technology. STARCO has engineered it with quality natural rubber compounds and a modern and highly functional design. It guarantees better steering precision, higher mechanical strength, reduced heat build up and a more comfortable ride for the operator, when compared to any other FLT tyre in the market.



Product benefits

- High steering precision
- Increased endurance
- Low tyre stress
- Excellent shock absorption
- Better operator comfort
- STARCO engineered

Large contact area


The greater the area of the tyre surface that is in contact with the ground, the greater its load bearing capability. But a wide tyre without voids between the treads would be subjected to extreme stress when negotiating tight turns, resulting in excessive wear and tear.

The Tusker tyre has a higher net-to-gross contact area in the centre band of the tyre surface – resulting in a tyre that can bear heavy loads without undue stress on the rubber compounds, whilst offering the optimal manoeuvrability and steering precision.

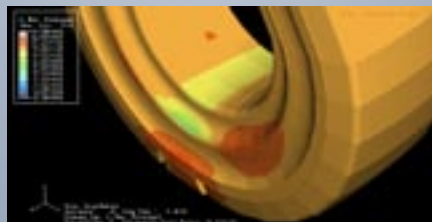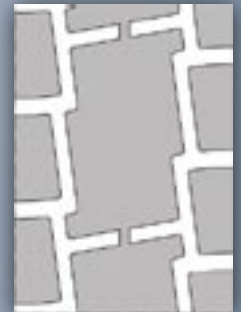

Three layer design

The excellent characteristics of the Tusker tyre lie in the three-layer design. These three layers work together resulting in a tyre that is perfect for fork lift truck applications.

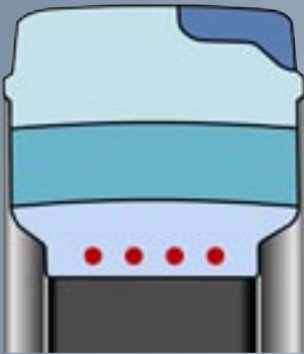

Tread layer

Natural rubber compound · Wear and tear resistant · Reduced chunking and chipping
· Low heat build up

Resilient layer

Low hysteresis compound · Optimal elasticity and shock absorption for a more comfortable ride · Low heat build up

Bead layer

Tough natural rubber compound · Integral steel bands and bead ring reinforcement




STARCO TUSKER

Product range




Dimension	Tread pattern	Standard fit	Standard fit NonMark	EasyFit	EasyFit NonMark	mm	mm	kg	kg	kg	km/h
8"											
4.00-8	STARCO Tusker	■	■			400	107	950	950	730	25 3.00D
5.00-8	STARCO Tusker	■	■	■	■	445	120	1415	1415	1090	25 3.00
15x4 1/2-8	STARCO Tusker	■	■	■	■	376	120	1040	1040	800	25 3.00D
16x6-8	STARCO Tusker	■	■	■	■	418	150	1455	1455	1120	25 4.33R
18x7-8	STARCO Tusker	■	■	■	■	450	153	2140	2140	1650	25 4.33
9"											
6.00-9	STARCO Tusker	■	■	■	■	518	143	1885	1885	1450	25 4.00E
21x8-9	STARCO Tusker	■	■	■	■	517	179	2755	2755	2120	25 6.00E
10"											
200/50-10	STARCO Tusker	■	■	■	■	454	194	2470	2470	1900	25 6.50F
6.50-10	STARCO Tusker	■	■	■	■	574	168	2340	2340	1800	25 5.00F
23x9-10	STARCO Tusker	■	■	■	■	582	196	3445	3445	2650	25 6.50F
12"											
7.00-12	STARCO Tusker	■	■	■	■	643	176	2920	2920	2240	25 5.00S
27x10-12	STARCO Tusker	■	■	■	■	670	250	3900	3900	3000	25 8.00G
15"											
8.25-15	STARCO Tusker	■	■	■	■	796	212	4750	4750	3650	25 6.50
28x9-15	STARCO Tusker	■	■	■	■	690	220	3770	2430	1870	25 7.00
250-15	STARCO Tusker	■	■	■	■	714	240	4750	4750	3750	25 7.00
300-15	STARCO Tusker	■	■	■	■	815	250	5850	5850	4500	25 8.00
355/65-15	STARCO Tusker	■	■	■	■	815	330	7800	7800	6000	25 9.75

For complete technical specifications, prices etc. - please refer to our main catalogue.

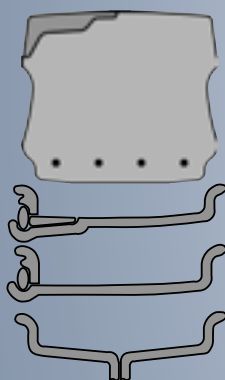

Standard fitment tyres fit on off-centre-split and centre-split rims.

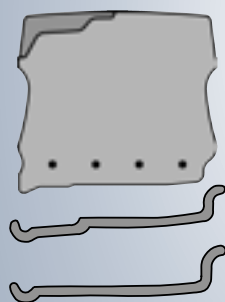

EasyFit tyres fit on one-piece basic rims - no lock ring, flange and advance band needed.



Tusker



Tusker NonMark

STARCO Europe A/S

Bizonvej 4 • Skovby • DK-8464 Galten

Tel. +45 87 54 00 00 • Fax +45 87 54 00 11 • info@starco.com • www.starco.com

